

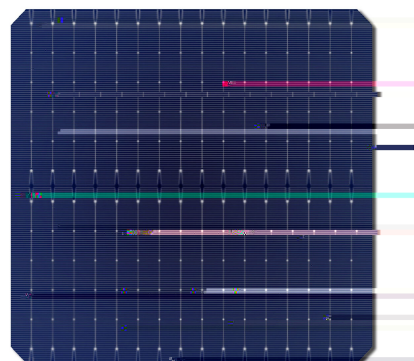


## 高效双面单晶电池

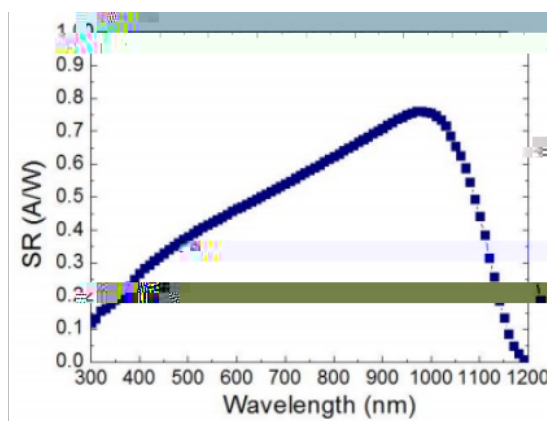

## 产品特性

|     |          |         |       |      |     |       |   |     |            |
|-----|----------|---------|-------|------|-----|-------|---|-----|------------|
|     |          |         |       |      |     |       |   |     |            |
|     | 182      | *183.75 | !0.25 | ,    | 247 | !0.25 |   |     | : -0.26%/  |
|     | 145±15   |         |       |      |     |       |   |     | : +0.046%/ |
| (+) | 16*0.04! | 0.03    | 主     | ( ), | 148 | 副     | , | ( ) | : -0.32%/  |
| (-) | 16*0.04! | 0.03    | 主     | ( ), | 120 | 副     | , | ( ) | 50 , 2 0.8 |

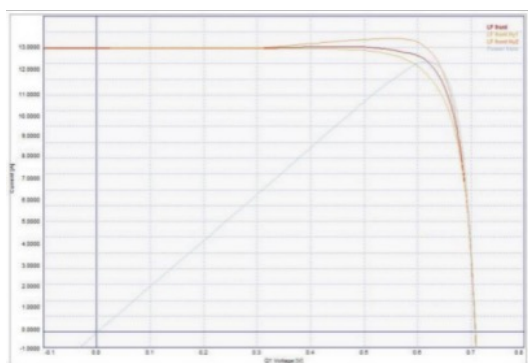

| 代                                  |      | 出 出 出 |      |       |        |       |        | 充     |
|------------------------------------|------|-------|------|-------|--------|-------|--------|-------|
|                                    |      |       |      |       |        |       |        |       |
|                                    |      | (%)   | ( )  | ( )   | ( )    | ( )   | ( )    | (%)   |
| -182                               | -252 | 25.2  | 8.39 | 0.639 | 13.131 | 0.719 | 13.782 | 84.69 |
| -182                               | -251 | 25.1  | 8.36 | 0.638 | 13.110 | 0.719 | 13.770 | 84.44 |
| -182                               | -250 | 25.0  | 8.33 | 0.635 | 13.111 | 0.717 | 13.769 | 84.36 |
| -182                               | -24  | 24.9  | 8.29 | 0.633 | 13.107 | 0.714 | 13.769 | 84.32 |
| -182                               | -248 | 24.8  | 8.26 | 0.630 | 13.112 | 0.713 | 13.772 | 84.20 |
| -182                               | -247 | 24.7  | 8.23 | 0.630 | 13.062 | 0.713 | 13.745 | 83.95 |
| -182                               | -246 | 24.6  | 8.19 | 0.626 | 13.085 | 0.710 | 13.765 | 83.82 |
| -182                               | -245 | 24.5  | 8.16 | 0.625 | 13.055 | 0.708 | 13.748 | 83.81 |
| -182                               | -244 | 24.4  | 8.13 | 0.622 | 13.061 | 0.707 | 13.753 | 83.62 |
| -182                               | -243 | 24.3  | 8.10 | 0.620 | 13.054 | 0.704 | 13.739 | 83.68 |
| -182                               | -242 | 24.2  | 8.06 | 0.618 | 13.037 | 0.703 | 13.727 | 83.49 |
| -182                               | -241 | 24.1  | 8.03 | 0.616 | 13.023 | 0.700 | 13.726 | 83.52 |
| -182                               | -240 | 24.0  | 7.99 | 0.615 | 12.989 | 0.701 | 13.718 | 83.17 |
| -182                               | -23  | 23.9  | 7.96 | 0.613 | 12.995 | 0.699 | 13.729 | 82.91 |
| -182                               | -238 | 23.8  | 7.93 | 0.611 | 12.971 | 0.698 | 13.715 | 82.82 |
| -182                               | -237 | 23.7  | 7.89 | 0.610 | 12.932 | 0.700 | 13.737 | 82.10 |
| 准 件: 1000 / <sup>2</sup> , 1.5, 25 |      |       |      |       |        |       |        |       |